

ASSA ABLOY

ASSA ABLOY Entrance Systems Ltd
 Industrial Door and Docking Solutions
 7Churchill Way .35A Business Park
 Chapeltown Sheffield UK S35 2PY



Tel: +44 (0)114 257 4330
 Fax: +44 (0)114 257 4399

Contractors Notes:




Contractor to provide a flush fixing face for installation of the door. Jambs and lintels to be flush, plumb in the same plane & clear of projections. Also please take into account all head & side room clearances required to accommodate the door. We remind you that its the clients responsibility to ensure the structure is suitable to accept the weight of the door, components & fixings. If in doubt please engage the services of a structural engineer. Approx Door Weight: **45kg's m²**

Electrical Requirements

A 415v 3 phase pre - wired motor with integral limit switches, low level control panel with panel mounted UP DOWN & STOP buttons and a 5 pin pre wired plug. Client **must** provide a surface mounted 16 amp 5 pin (3 phases earth & neutral) mains wired female socket within 1 metre of the control panel.

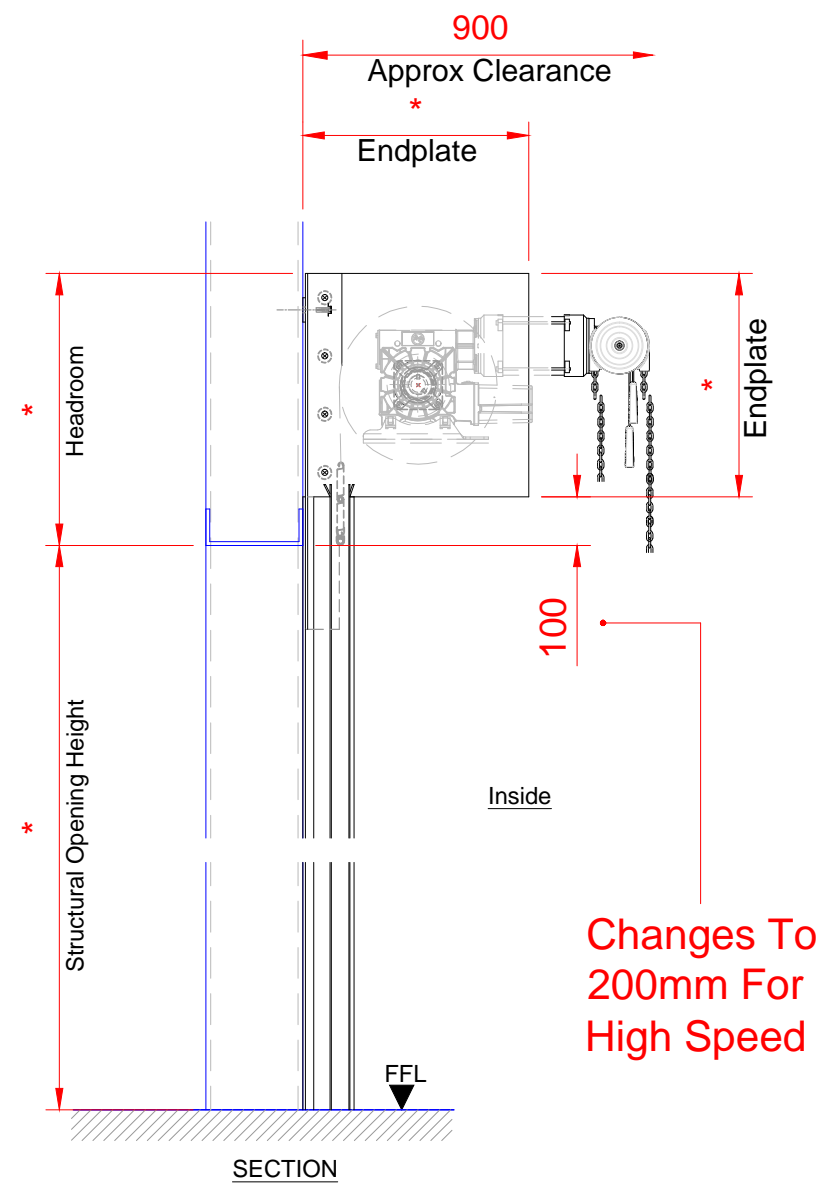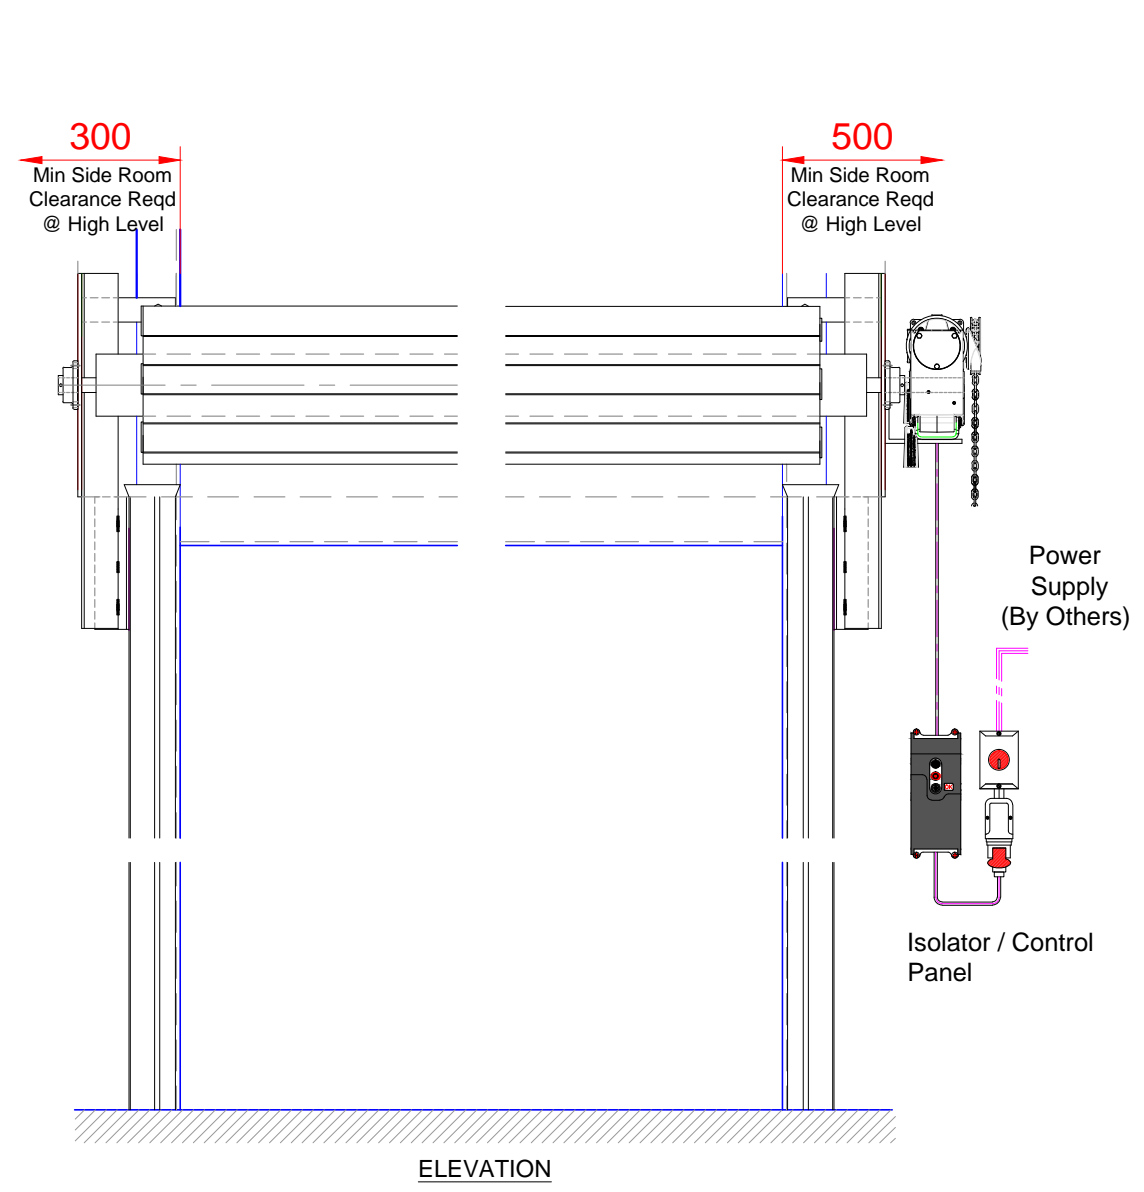

Changes To
 200mm For
 High Speed

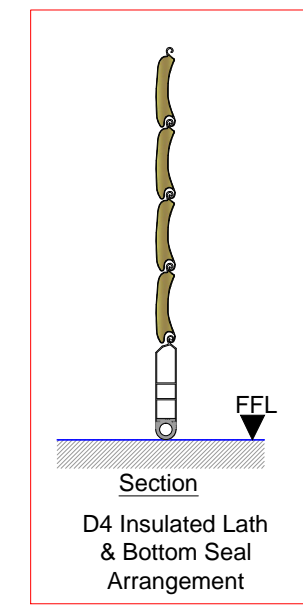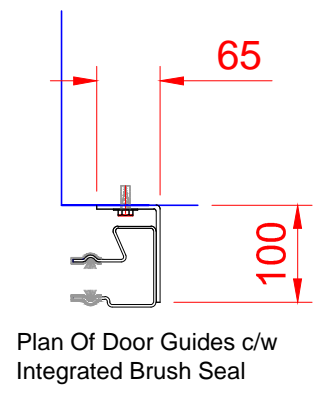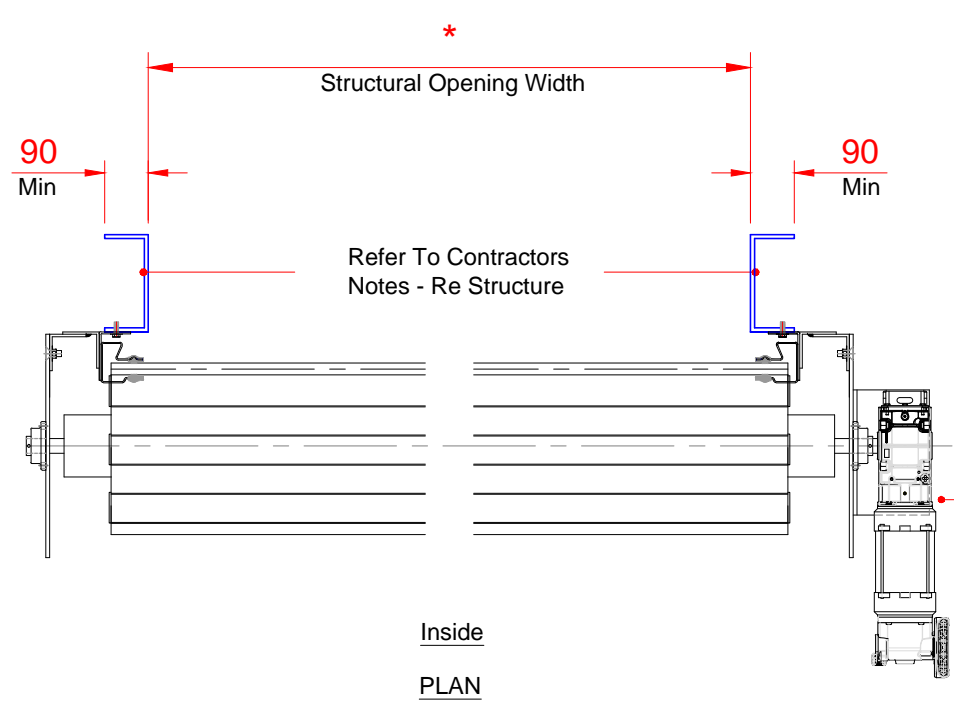

Motor
 Position

Quantity:	Nr As Drawn	Ref:	.
Operation:	<input type="checkbox"/> Manual Push Up	<input type="checkbox"/> Tube Motor	
	<input type="checkbox"/> Handchain	<input checked="" type="checkbox"/> Safedrive	
Type:	<input checked="" type="checkbox"/> Insulated D4		
Finish:	<input type="checkbox"/> Galv...Remainder Of Door.....		
	<input type="checkbox"/> Ppc... Remainder Of Door		
	<input type="checkbox"/> Laminated Curtain Clr.....		

*
 *

Rev	Description	Date
-	-	-

Drawn		DO NOT SCALE!
Date		
Chk'd		Date
Drg No.		Rev