



Alt. F

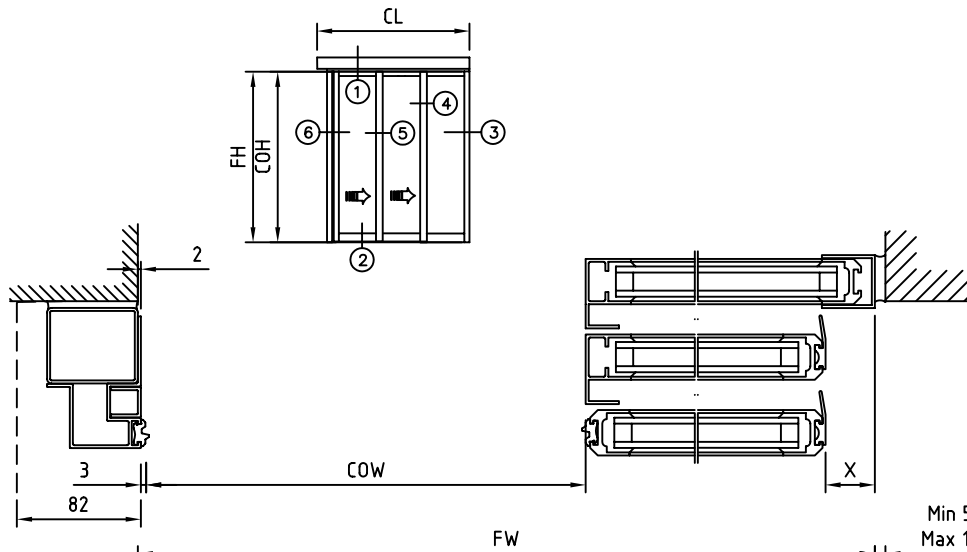

Alt. U

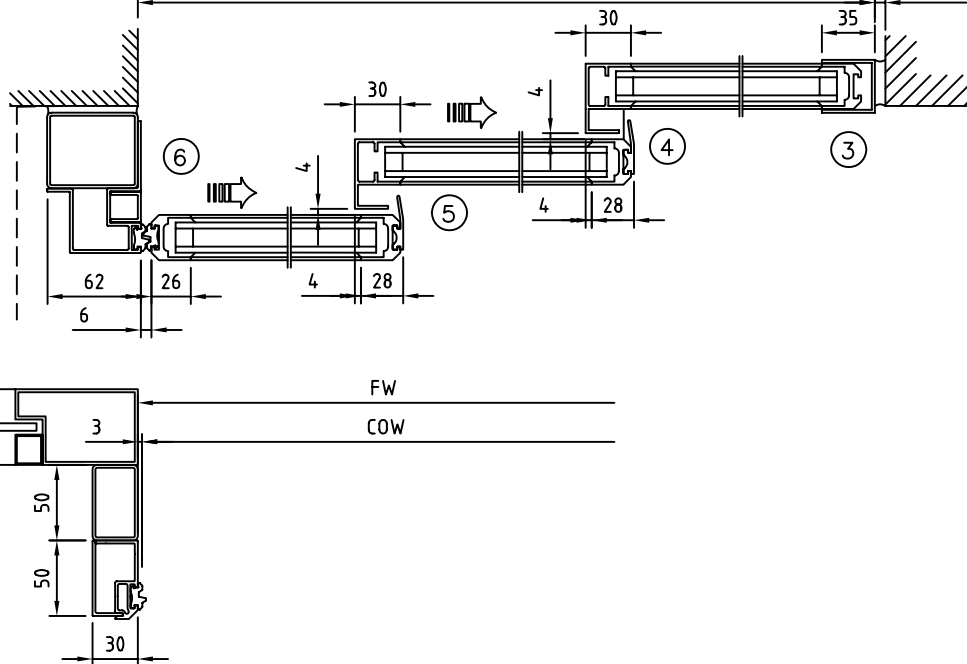

State when ordering

- FW=.....mm
- FH=.....mm
- X=.....mm
- COW=.....mm
- COH=.....mm
- Cover
- CL=.....mm

Profile option

- Alt. F (concrete/brick)
- Alt. U (aluminium/steel)

Surface treatment

- Silver anodized
- Special anodized.....
- RAL.....
- Special powder coating.....
-

Glass

6/10/6 Insulated laminated glass

Lock

- Floor lock Euro 1-way
- Floor lock Euro 2-way

FW= Frame width
 Min. 1600 / max. 4800
 Alt. F FW=1,5COW+36,5+X
 Alt. U FW=1,5COW+33,5+X

FH= Frame height
 Min. 1900 / max. 3000

X= Safety distance (70 mm)

COW= Clear opening width
 Alt. F COW=2(FW-36,5-X)/3
 Alt. U COW=2(FW-36,5-X)/3+2

COH= Clear opening height
 COH=FH-50

CL= Cover length

Scale 1:5

Customer:

EntreMatic ref:

Door id:

Date:

Project No:

Sign:

Profile system
EMPS-T Thermo with EMSL-T
3 Panel wall mounted right



2

833071